


Ventilation Assessment Summary

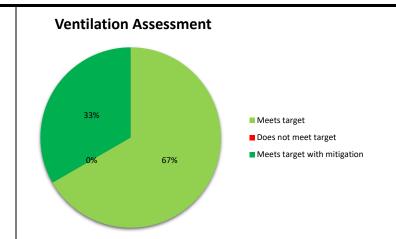

#	HVAC		Site		Air Changes			Recommendation		Mitigation
#	Room	Туре	Campus	Building	Target	Actual	Result	Min. CADR	Min. Supply	Applied CADR
1	AC110	Art Classroom	Laney College	Art Center	4	4.7	Meets target with mitigation	58	714	167
2	AC112	Classroom	Laney College	Art Center	3	5.5	Meets target	0	564	0
3	AC101	Art Classroom	Laney College	Art Center	3	6.7	Meets target	0	80	0
4	AC100	Art Classroom	Laney College	Art Center	3	13.1	Meets target	0	2846	0
5	AC102	Occupiable Storage (Dry)	Laney College	Art Center	3	6.0	Meets target	0	78	0
6	AC103	Office	Laney College	Art Center	3	4.4	Meets target	0	118	0
7	AC113	Office	Laney College	Art Center	3	8.8	Meets target	0	50	0
8	AC120	Art Classroom	Laney College	Art Center	3	3.3	Meets target with mitigation	619	1201	725
9	AC121	Office	Laney College	Art Center	3	5.4	Meets target	0	72	0
10	AC122	Occupiable Storage (Dry)	Laney College	Art Center	3	6.3	Meets target with mitigation	46	121	167
11	AC125	Art Classroom	Laney College	Art Center	3	3.3	Meets target with mitigation	596	1379	725
12	AC126	Office	Laney College	Art Center	3	7.2	Meets target	0	73	0
13	AC127	Occupiable Storage (Dry)	Laney College	Art Center	3	4.0	Meets target	0	113	0
14	AC132	Office	Laney College	Art Center	3	5.8	Meets target with mitigation	77	105	167
15	AC135	Art Classroom	Laney College	Art Center	3	6.5	Meets target	0	2469	0
16	AC130	Art Classroom	Laney College	Art Center	3	8.6	Meets target	0	1694	0
17	AC136	Occupiable Storage (Dry)	Laney College	Art Center	3	4.1	Meets target with mitigation	109	171	167
18	AC137	Office	Laney College	Art Center	3	7.2	Meets target	0	93	0
19	AC138	Kitchen	Laney College	Art Center	3	3.4	Meets target with mitigation	875	963	1004
20	AC139	Occupiable Storage (Dry)	Laney College	Art Center	3	5.4	Meets target	0	296	0
21	AC140	Art Classroom	Laney College	Art Center	3	3.3	Meets target	0	154	0