


Ventilation Assessment Summary

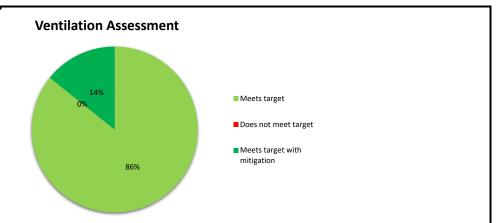

#	HVAC		Site		Air Changes			Recommendation		Mitigation	BISSEL
	Room	Туре	Campus	Building	Target	Actual	Result	Min. CADR	Min. Supply	Applied CADR	220
1	Play Area	Classroom (<4)	Laney College	Children's Center	3	3.7	Meets target with mitigation	34	678	167	1
2	CC3	Office	Laney College	Children's Center	3	8.2	Meets target	0	78	0	
3	CC5	Occupiable Storage (Dry)	Laney College	Children's Center	3	10.7	Meets target	0	23	0	
4	<u>CC6</u>	Classroom (<4)	Laney College	Children's Center	3	13.8	Meets target	0	133	0	
5	CC9	Classroom (<4)	Laney College	Children's Center	4	21.0	Meets target	0	670	0	
6	CC16	Classroom (<4)	Laney College	Children's Center	3	7.2	Meets target	0	394	0	
7	<u>Hallway</u>	Lobby	Laney College	Children's Center	3	5.8	Meets target	0	209	0	